




AQUAMATIC 155 A/100 CTH

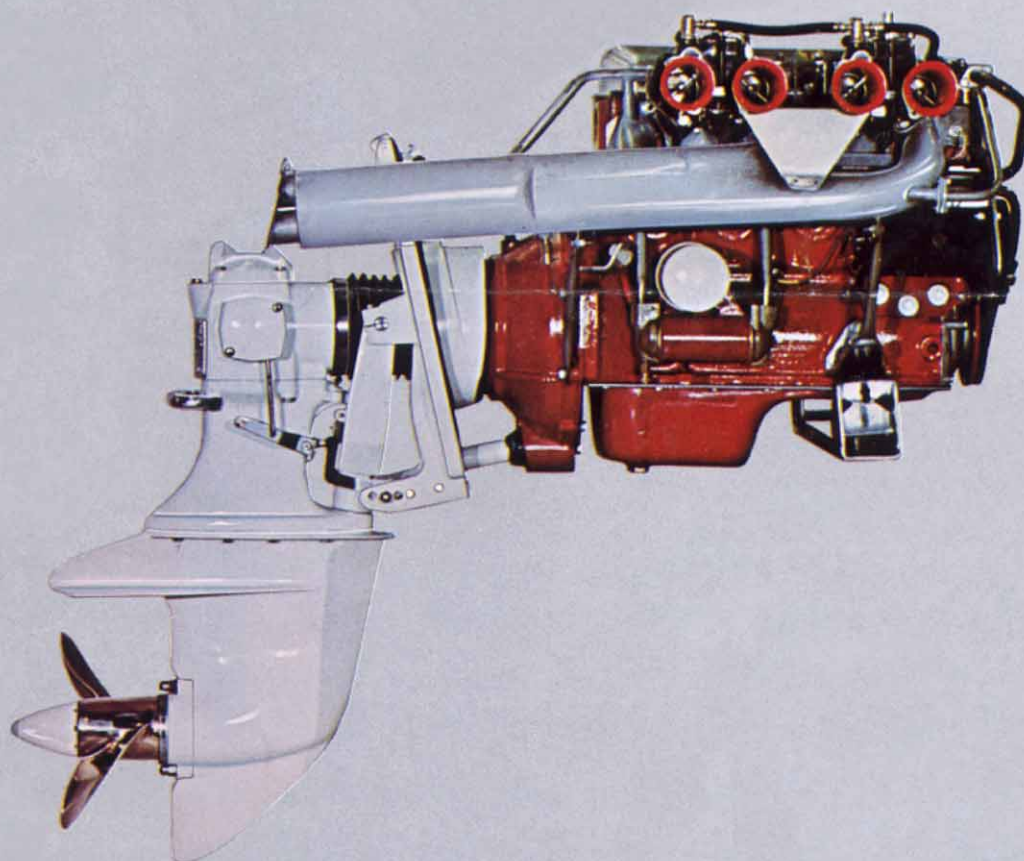

The Aquamatic 155 A/100 CTH is a further development of the world-renowned four-cylinder, four-stroke Volvo Penta unit with an outboard drive.

The engine and outboard drive are fitted through a mounting collar in the transom. The sturdy dimensions of the mounting collar and its large areas with fully protected rubber seals against the transom mean that the outboard drive form a dependable and outstandingly seaworthy unit with the boat — even in the case of extreme stress.

Despite the sturdiness of the AQ 155 A/100 CTH unit the dimensions are very favourable for installation in small, fast boats.




All orders and inquiries concerning the AQ 155 A/100 CTH unit and parts should be sent to:

AB VOLVO


Volvo Competition Service
405 08 GÖTEBORG
Phone: 031-54 00 00

Mounting parts for the AQ 155 A/100 CTH


1. Support frame
2. Engine bracket
3. Engine bracket
4. Rubber block
5. Rubber bellows
6. Support ring
7. Water intake
8. Hose for water intake
9. Fuel hose
10. Filter
11. Oil drain tube
12. Instrument panel complete with wires (single installation)
13. Main switch

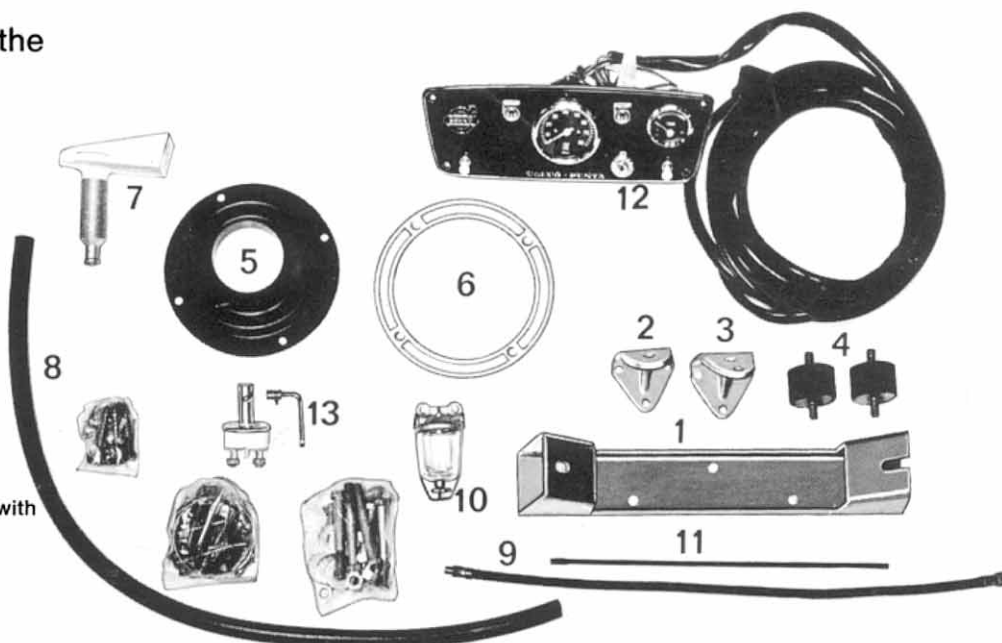

Instrument panel

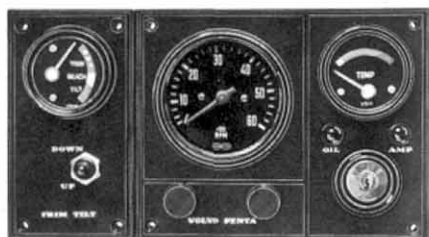

Engine cut-out

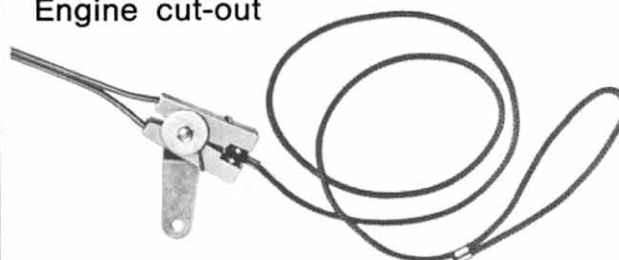

Technical Data

Output b.h.p. at r.p.m. (DIN)	155/5,700
Torque, k.p.m. at r.p.m. (DIN)	19.5/4,500
Max. operation speed r.p.m.	5,800
Compression ratio	11.2:1

Carburetors (3)	Solex 45 DDH-M
Weight in kilos: Engine (incl. of mounting kit, instrument panel and collar)	170
Outboard drive	45
Ratio	1.67:1

Dimension Drawing

